



# Standard MANOSKOP® torque wrenches w.permanently installed ratchet

#### 721/5 Quick

Art.No. 50204005

GTIN **4018754268917** Model **721/5 QUICK** 

Label. Torque wrench MANOSKOP No. 721/5 Quick Measuring-R. 6-50Nm Output 3/8" L.

352mm

Features. click-type

the measuring element is only under load while force is being applied, no need for

manual reset to zero

rapid setting thanks to easy-action locking lever in the handle ergonomically designed, non-slip adjuster with a thumb recess

dual stop signal twin scales N·m/ft·lb

optimised convex handle for strain-free working

any force applied to the tool after the 'click' or applied in the opposite direction to the current function — e.g. forcible loosening of a jammed screw — does not act on

the trigger mechanism and cannot cause damage to it

all the sensitive components are protected by the sturdy tubular steel housing calibration using perfectControl® calibrating unit No 7794 or calibration system No

7706. Readjustment does not require disassembly. certificate in accordance with DIN EN ISO 6789-2:2017

display deviation value ± 4%

## Advantages.

Made in Germany – STAHLWILLE release torque wrench, ratchet with punch square, length 352 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204005

Patented, low-wear release system with bending rod

Lightning-fast and precise torque adjustment

Continued loading after release or loading in the opposite functional direction will not damage the torque wrench

STAHLWILLE: For over 160 years, we as a traditional German company from Wuppertal have stood for tools that are appreciated around the world for their excellent quality

### Product highlights.

# \_

#### Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a ¢exible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.



#### Protected.

The internal mechanism is extremely resistant to mechanical wear and well protected against dirt and soiling inside the outer housing.



#### Wear-resistant.

Wear resistant trigger system with a flexible rod. In contrast to conventional torque wrenches, it is not necessary to reset the wrench to zero after each job to unload the spring. In this way, users benet from long@term accuracy and safe measurement results with less time required.



#### Fast


Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.




#### Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

## Technical Drawing.

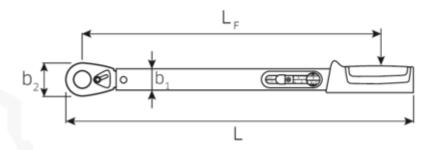



352

### **Technical Attributes.**

### Logistics data.

Output square drive outside (inch)

3/8"

Length (IFS)

Width (IFS) 40

b2         27,5 mm         Length (packed, mm)         370           Width mm (b)         40 mm         Width (packed, mm)         45           Size         5         Height (packed, mm)         50           Height mm (h)         50 mm         Volume (packed, mm)         0.8325 dm3           Height mm (h1)         23 mm         Code         50204005           Height mm (h2)         14,5 mm         Weight (gross, kg)         0,960           Length mm (L)         352 mm         Weight PAP (kg)         0,000           LF         293 mm         Weight PVC (kg)         0,000           Lowest value of measurement range N-m         6 N·m         GTIN         4018754268917           Measuring range ft-lb         5-36 ft-lb         Region of origin         Nordrhein-Westfalen           Measuring range N-m         6-50 N·m         WEEE/Electrical Act         nicht ear-pflichtig           Nominal value N-m         50 N·m         Numbers of content units         2041100           Scale division [E1]         2 N·m         Numbers of content units         1           Scale division [E2]         1 ft-lb         Weight         Weight         880 g	b1	28 mm	Height (IFS)	50
Size         5         Height (packed, mm)         50           Height mm (h)         50 mm         Volume (packed, mm)         0.8325 dm3           Height mm (h1)         23 mm         Code         50204005           Height mm (h2)         14,5 mm         Weight (gross, kg)         0,960           Length mm (L)         352 mm         Weight PAP (kg)         0,000           LF         293 mm         Weight PVC (kg)         0,000           Lowest value of measurement range N-m         6 N·m         GTIN         4018754268917           Measuring range ft-lb         5-36 ft·lb         Region of origin         Nordrhein-Westfalen           Measuring range N-m         6-50 N·m         WEEE/Electrical Act         nicht ear-pflichtig           Nominal value N-m         50 N·m         Customs tariff no.         82041100           Scale division [E1]         2 N·m         Numbers of content units per order units         1	b2	27,5 mm	Length (packed, mm)	370
Height mm (h) 50 mm Volume (packed, mm) 0.8325 dm3  Height mm (h1) 23 mm Code 50204005  Height mm (h2) 14,5 mm Weight (gross, kg) 0,960  Length mm (L) 352 mm Weight PAP (kg) 0,000  LF 293 mm Weight PVC (kg) 0,000  Lowest value of measurement range N-m GTIN 4018754268917  Country of origin GERMANY  Measuring range ft-lb 5-36 ft-lb Region of origin Nordrhein-Westfalen  Measuring range N-m 6-50 N·m WEEE/Electrical Act nicht ear-pflichtig  Nominal value N-m 50 N·m Customs tariff no. 82041100  Scale division [E1] 2 N·m Numbers of content units per order units	Width mm (b)	40 mm	Width (packed, mm)	45
Height mm (h1)         23 mm         Code         50204005           Height mm (h2)         14,5 mm         Weight (gross, kg)         0,960           Length mm (L)         352 mm         Weight PAP (kg)         0,000           LF         293 mm         Weight PVC (kg)         0,000           Lowest value of measurement range N-m         6 N·m         GTIN         4018754268917           Country of origin         GERMANY           Measuring range ft-lb         Region of origin         Nordrhein-Westfalen           Measuring range N-m         6-50 N·m         WEEE/Electrical Act         nicht ear-pflichtig           Nominal value N-m         50 N·m         Customs tariff no.         82041100           Scale division [E1]         2 N·m         Numbers of content units per order units         1	Size	5	Height (packed, mm)	50
Height mm (h2)  Length mm (L)  Solve to Veight PAP (kg)  Lowest value of measurement range N-m  Measuring range ft-lb  Measuring range N-m  Measuring range N-m  Solve to Nominal value N-m  Scale division [E1]  Solve to Meight PAP (kg)  Weight PAP (kg)  O,000  GTIN  GTIN  4018754268917  Country of origin  Region of origin  MEEE/Electrical Act  Nordrhein-Westfalen  Nordrhein-Westfalen  Nordrhein-Westfalen  Customs tariff no.  Numbers of content units per order units  Numbers of content units  per order units	Height mm (h)	50 mm	Volume (packed, mm)	0.8325 dm3
Length mm (L)352 mmWeight PAP (kg)0,000LF293 mmWeight PVC (kg)0,000Lowest value of measurement range N-m6 N·mGTIN4018754268917Measuring range ft-lb5-36 ft·lbRegion of originNordrhein-WestfalenMeasuring range N-m6-50 N·mWEEE/Electrical Actnicht ear-pflichtigNominal value N-m50 N·mCustoms tariff no.82041100Scale division [E1]2 N·mNumbers of content units per order units1	Height mm (h1)	23 mm	Code	50204005
Lowest value of measurement range N-m  Measuring range ft-lb  Measuring range N-m  Scale division [E2]  293 mm  Weight PVC (kg)  0,000  4018754268917  Country of origin  Region of origin  Nordrhein-Westfalen  MeEE/Electrical Act  Nowinal value N-m  Customs tariff no.  Numbers of content units per order units  1	Height mm (h2)	14,5 mm	Weight (gross, kg)	0,960
Lowest value of measurement range N-m6 N·mGTIN4018754268917Measuring range ft-lb5-36 ft·lbRegion of originNordrhein-WestfalenMeasuring range N-m6-50 N·mWEEE/Electrical Actnicht ear-pflichtigNominal value N-m50 N·mCustoms tariff no.82041100Scale division [E1]2 N·mNumbers of content units per order units1Scale division [E2]1 ft·lbper order units	Length mm (L)	352 mm	Weight PAP (kg)	0,000
range N-mCountry of originGERMANYMeasuring range ft-lb5-36 ft·lbRegion of originNordrhein-WestfalenMeasuring range N-m6-50 N·mWEEE/Electrical Actnicht ear-pflichtigNominal value N-m50 N·mCustoms tariff no.82041100Scale division [E1]2 N·mNumbers of content units per order units1Scale division [E2]1 ft·lbper order units	LF	293 mm	Weight PVC (kg)	0,000
Measuring range ft-lb  Measuring range N-m  Mominal value N-m  Scale division [E1]  Scale division [E2]  Country or origin  Region of origin  Nordrhein-Westfalen  Nordrhein-West	Lowest value of measurement	6 N·m	GTIN	4018754268917
Measuring range N-m6-50 N·mWEEE/Electrical Actnicht ear-pflichtigNominal value N-m50 N·mCustoms tariff no.82041100Scale division [E1]2 N·mNumbers of content units per order units1	range N-m		Country of origin	GERMANY
Measuring range N-m6-50 N·mWEEE/Electrical Actnicht ear-pflichtigNominal value N-m50 N·mCustoms tariff no.82041100Scale division [E1]2 N·mNumbers of content units1Scale division [E2]1 ft·lbper order units	Measuring range ft-lb	5-36 ft·lb	Region of origin	Nordrhein-Westfalen
Nominal value N-m50 N·mCustoms tariff no.82041100Scale division [E1]2 N·mNumbers of content units1Scale division [E2]1 ft·lbper order units	Measuring range N-m	6-50 N·m		nicht ear-pflichtig
Scale division [E2] 1 ft·lb per order units	Nominal value N-m	50 N·m	Customs tariff no.	
•	Scale division [E1]	2 N·m	Numbers of content units	1
Weight 880 g	Scale division [E2]	1 ft·lb		
			Weight	880 g

# Variants.

Code	Article number (ER	GTIN	
50204005	721/5 QUICK	Torque wrench MANOSKOP No. 721/5 Quick Measuring-R. 6-50Nm Output 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	Torque wrench MANOSKOP No. 721/15 Quick Measuring-R. 30-150Nm Output 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	Torque wrench MANOSKOP No. 721/20 Quick Measuring-R. 40-200Nm Output 1/2" L. 483mm	4018754268931
50204030	721/30 QUICK	Torque wrench MANOSKOP No. 721/30 Quick Measuring-R. 60-300Nm Output 1/2" L. 553mm	4018754268948

# GTIN-Code.



# Spare parts.



59191005 Ratchet spare parts sets for torque wrenches No.721

# Images.

